

Weitzer PRO 360

2-layer engineered parquet

Dimensions: 360 x 108 x 10,3mm

Installation methods:



Functionalities:



MAINTENANCE-FREE PARQUET – ProStrong matt: For residential use the complicated and time-consuming maintenance is no longer required




HEALTHY PARQUET – ProVital finish: Allergy-friendly, antibacterial, breathable and antistatic properties



SOUND-REDUCTION PARQUET: ambient noise drastically reduced at full adhesion

Laying patterns:

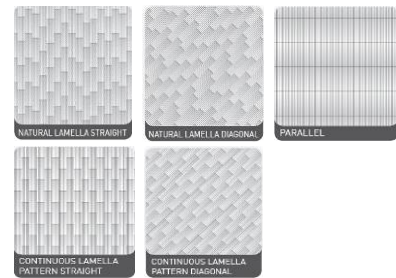

Product description:

Place of production	Austria
Total thickness	10,3 mm. 2-layer construction
Wear layer	approx. 3,6mm solid wood
Supporting material	wood-based material
Profiling	4-sided tongue and groove. 5-strip, header joint edge impregnation
Moisture content	Long seasoned and kiln-dried wood (moisture content at delivery $8\% \pm 1\%$)
Under-floor heating	suitable (refer to Technical Datasheet MB020)
Fire resistance EN 13501-1	Cfl-s1 for wood type oak (except fumed oak) with surface Pro Strong matt or Pro Vital f Dfl-s1 for other wood types with Pro Strong matt or Pro Vital f surface (please pay attention to the conditions for installation)
Heat conductivity resistance	0,061 m ² K/W
Renovation	multiple sanding possible
Hardness (Brinell)	23-42 N/mm ² (depending on the type of wood)
Ecological responsibility	



Surfaces:



PROSTRONG matt – THE LACQUERED SURFACE FINISH WITH LOW GLOSS GRADE

Maintenance-free in private living areas thanks to multi-layer lacquer coating. Antistatic and with antibacterial properties. Corresponds to stress class C according to ÖNORM C 2354 for particularly high stress with regards to scratch resistance. Chemical resistant according to EN 13442. Suitable for chair castors according to EN 425. Slip resistance class R 9 according to DIN 51130.



PROVITAL finish – THE NATURAL OILED SURFACE

Pure natural oils that penetrate deep into the pores, giving the parquet a special protection. Particularly breathable. Repairable as a whole or on single spots. Factory-finished oiled surface for private living areas (finish) - for use in public areas additional finish application after installation is mandatory. Natural coating material in accordance with ÖNORM C 2380. Slip resistance class R 10 according to DIN 51130.

Intelligent Characteristics:

Particularly high quality and durable due to the solid wood layer of approx. 3.6 mm.

Concluding remarks:

Dimensional data and technical characteristics of wood may be subject to minor deviations due to material or production technology. PEFC/FSC on request. Any change to the product after delivery can lead to changes in the declared product properties (e.g. fire behavior or slide properties) and the contractor is not liable for this. Change in R-value possible depending on haptic characteristics, care films and cleaning residues. Latest technical state as of 01-2026.